



ICY BOX IB-CR404-C31

CFexpress™ Type-B card reader with USB 3.2 (Gen 2)



Key features

- Card reader for CFexpress™ Type-B memory cards
- USB 3.2 (Gen 2) port with a data transfer rate of up to 10 Gbit/s
- Combi-cable USB Type-C® to Type-C® with Type-A adapter
- High-grade aluminium housing with cooling fins
- Plug & Play, no driver installation required
- Compatible with Windows®, macOS® and Chrome OS™

Packing content

1x IB-CR404-C31, 1x USB Type-C® to Type-C®/Type-A cable
1x Manual

Technical data

Model	IB-CR404-C31
Article no.	60929
EAN code	4250078172604
Brand	ICY BOX
Colour	Black
Material	Aluminium
Interface to host computer	USB 3.2 (Gen 2) Type-C® and Type-A
Card slots	CFexpress™ 2.0 Type-B

Transfer rate	Up to 10 Gbit/s
Plug & Play	Yes
LED	Power
Power supply	USB-powered
Operating system	Windows®, macOS®, ChromeOS®
System requirements	One free USB 3.2 (Gen 2) Type-C® or Type-A port on your host computer. Backwards compatible with USB 3.0/2.0. CFexpress™ Type-B memory card. Note that the full data transfer rate of up to 10 Gbit/s can only be achieved on a USB 3.2 (Gen 2) port.



ICY BOX **IB-CR404-C31** CFexpress™ Type-B card reader with USB 3.2 (Gen 2)




For the pros

The CFexpress 2.0 memory card standard is finding its way into system cameras in the professional segment. Those who use such memory cards also need high performance after shooting, hence the IB-CR404-C31. The combi-cable makes it possible to work with both USB Type-C and Type-A ports.



USB 3.2 (Gen 2) and NVMe

A good mixture for the highest expectations: with USB 3.2 (Gen 2), data transfer rates of up to 10 Gbit/s are achieved. Together with the NVMe protocol of the CFexpress Type-B memory cards, this results in a highly performant combination. Copy your files at 1 GB per second!

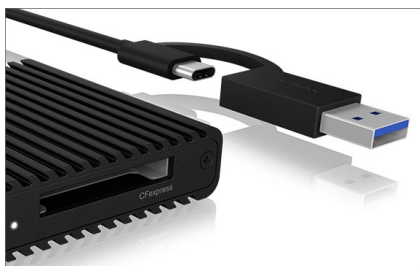

Cool black

Made of solid aluminium, the IB-CR404-C31 presents itself in a sleek black and a cooling fin design that not only looks cool. CFexpress memory cards can get very warm under heavy load. The cooling fins of this enclosure ensure optimal dissipation of the operating heat.

Logistical data

Packing unit: 40 pcs. / carton
Total weight: 6.98 kg
Gross weight: (with packing): 0.16 kg
Net weight: 0.07 kg

Dimension/carton: 500x220x300 mm
Dimension (with packing): 27x105x200 mm
Dimension of article: 59x64x15 mm
Country of origin: China