Product Specifications

CA-TNRNF-V2

Type N Male to Type N Female Right Angle Adapter



CHARACTERISTICS

General Specifications

Interface	N Male
Interface 2	N Female
Body Style	Right angle
Mounting Angle	Right angle

Electrical Specifications


Connector Impedance	50 ohm
Operating Frequency Band	0 – 3000 MHz
RF Operating Voltage, maximum (vrms)	707.00 V
dc Test Voltage	2500 V
Outer Contact Resistance, maximum	0.25 mOhm
Inner Contact Resistance, maximum	1.00 mOhm
Insulation Resistance, minimum	5000 MOhm
Average Power	600.0 W @ 900 MHz
Peak Power, maximum	10.00 kW

©2010 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope.All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

Product Specifications

CA-TNRNF-V2

Outline Drawing

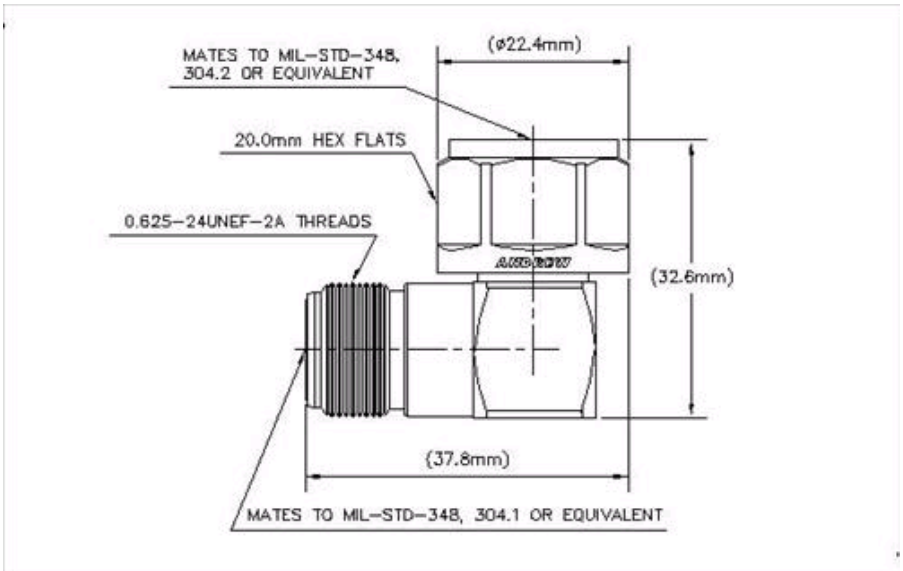

Mechanical Specifications

Coupling Nut Proof Torque	1.70 N-m | 1.25 ft lb
Coupling Nut Proof Torque Method	IEC 61169-16:9.3.6
Coupling Nut Retention Force	450.00 N | 101.16 lbf
Coupling Nut Retention Force Method	IEC 61169-16:9.3.11
Inner Contact Plating	Gold
Insertion Force	28.00 N | 6.29 lbf
Insertion Force Method	IEC 61169-16:9.3.5
Interface Durability	500 cycles
Interface Durability Method	IEC 61169-16:9.5
Outer Contact Plating	Trimetal
Pressurizable	No

Dimensions

Diameter	22.35 mm | 0.88 in
Length	37.78 mm | 1.49 in
Weight	73.87 g | 0.16 lb
Width	32.55 mm | 1.28 in

Environmental Specifications

Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)

©2010 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope.All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

Product Specifications

CA-TNRNF-V2

Storage Temperature	-65 °C to +125 °C (-85 °F to +257 °F)
Mechanical Shock Test Method	IEC 60068-2-27
Climatic Sequence Test Method	IEC 60068-1
Damp Heat Steady State Test Method	IEC 60068-2-3
Thermal Shock Test Method	IEC 60068-2-14
Vibration Test Method	IEC 60068-2-6
Corrosion Test Method	IEC 60068-2-11

Standard Conditions

Attenuation, Ambient Temperature	20 °C | 68 °F
Average Power, Ambient Temperature	40 °C | 104 °F
Average Power, Inner Conductor Temperature	100 °C | 212 °F

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
0–3000 MHz	1.04	33.94
3000–6000 MHz	1.19	21.19

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)





©2010 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope.All specifications are subject to change.
See www.commscope.com/andrew for the most current information.