

QuSector 9HV-65-4 Wi-Fi 6E

QuSector 9HV-65-4 Wi-Fi 6E offers a 65 degrees, 8dBi (2.4GHz) & 9dBi (5GHz-7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuSector 9HV-65-4 is a concurrent dual band, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at **2.4GHz** with 8dBi gain and at **5GHz-7GHz** with 9dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5-7.125GHz) helps to find suitable frequency for the most effective operation. It is designed to be applied mainly to special access points working in the systems where two bands (frequencies) are diplexed for one antenna connector. The antenna comes in three configurations: with 4*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC.
Part Number: RPTNC - S9HV.65.4RT; RPSMA - S9HV.65.4RS; Nm - S9HV.65.4NM;

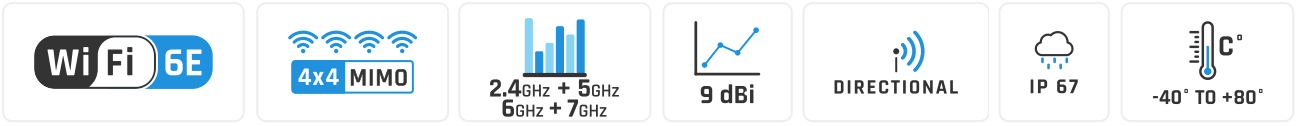

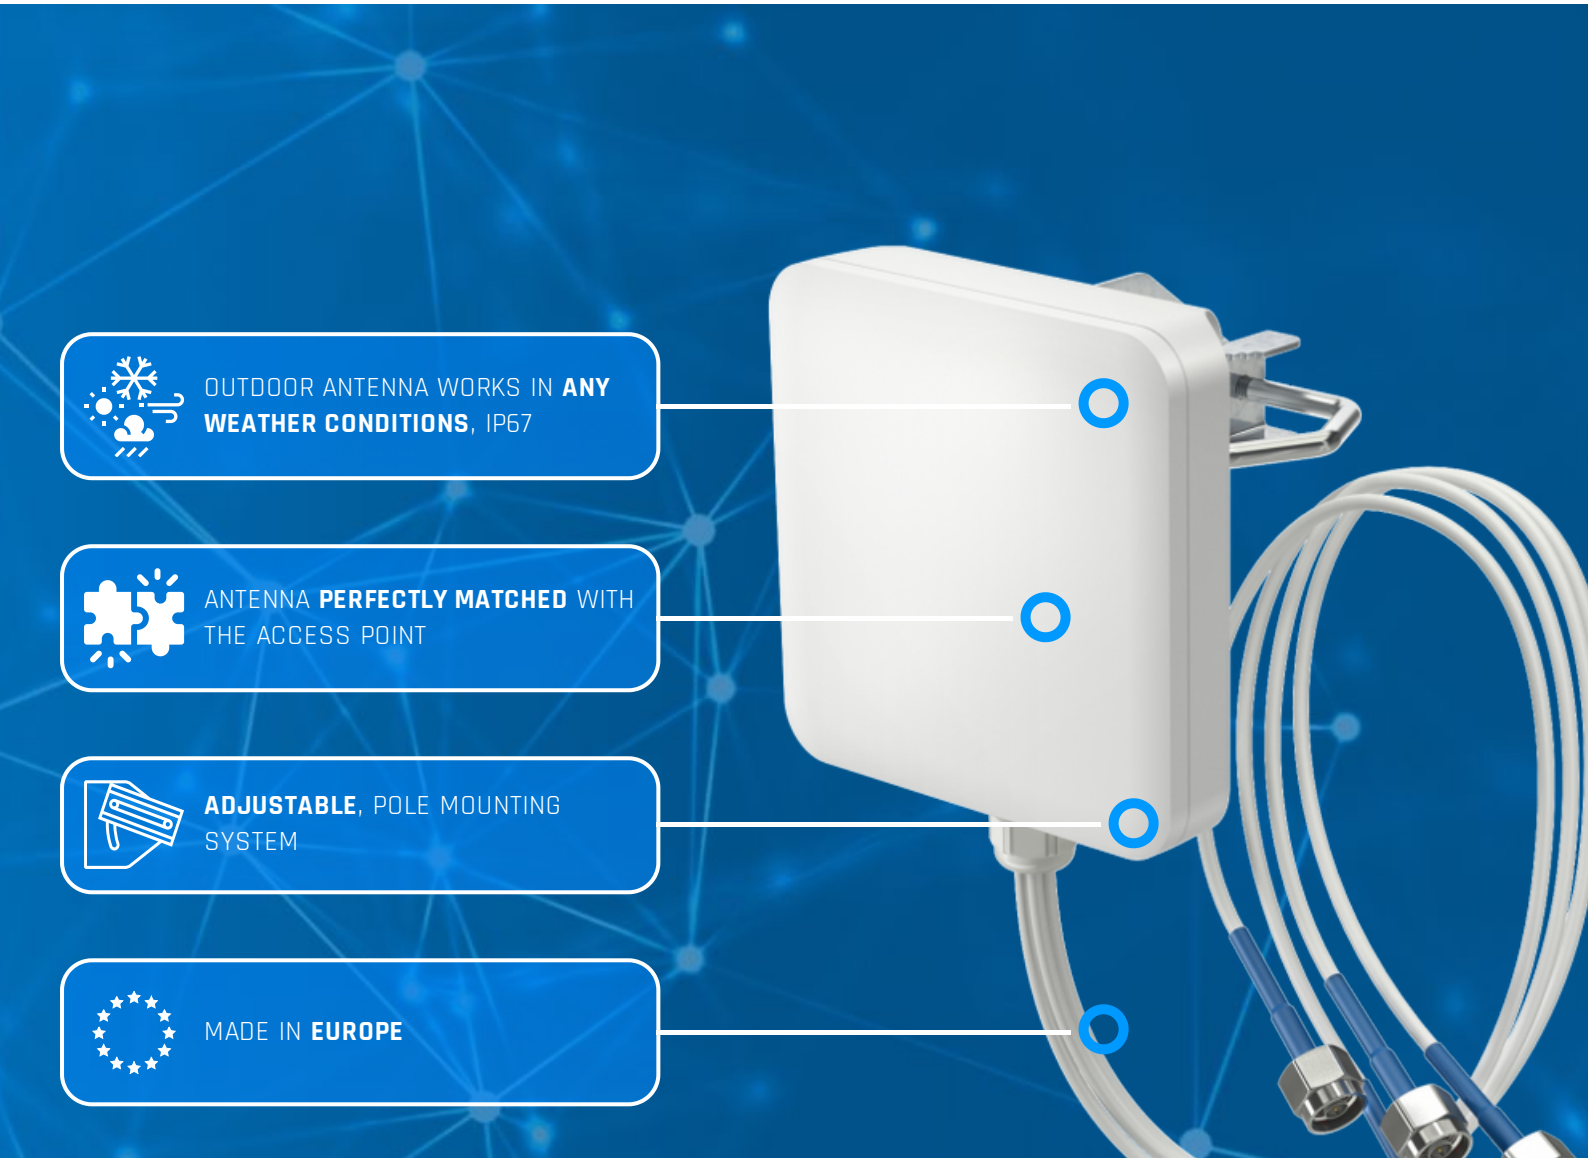

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 7.125 GHz
GAIN	2.4 - 2.5 GHz: 8 dBi 5 - 7.125 GHz: 9 dBi
VSWR	< 1.80
BEAMWIDTH	2.4 - 2.5 GHz - 65°/65° 5 - 7.125 GHz - 60°/60°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	2.4 - 2.5 GHz: > 33dB
FRONT-TO-BACK	2.4 - 2.5 GHz: 20dB 4.9 - 6 GHz: 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xRPSMA/4xNM/4xRPTNC
OUTER DIMENSIONS	16.5 x 16.5 x 4.5 cm 6.5 x 6.5 x 1.77 inch
WEIGHT	0.9 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

MATERIAL	Galvanized steel
WEIGHT	0.3 kg
MOUNTING PLACE	Mast
MAST DIAMETER	40-66 mm 1.57-2.60 inch

PART NUMBER

RPTNC	S9HV.65.4RT
RPSMA	S9HV.65.4RS
NM	S9HV.65.4NM

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

COMPATIBLE ROUTERS

VARIANT: S9HV.65.4RT

CISCO	AIR-CAP1852E, AIR-CAP2602E, AIR-CAP2702E, AIR-CAP2802E, AIR-CAP3602E, AIR-CAP3702E, AIR-CAP3702P, AIR-CAP3802E, AIR-CAP3802I, AIR-CAP3802P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, MR42E, MR46E, MR53E
OTHER	4 * RPTNC

VARIANT: S9HV.65.4RS

ADTRAN	Bluesocket 1925
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-634, AP-734, AP-764, IAP-314, IAP-324, IAP-334
CISCO	Catalyst IW9165E
COMSET	CM770W-6
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENS620EXT, ESW850
ERICSSON (CRADLEPOINT)	R2400
EXTREME NETWORKS	AP 305Cx, AP 8533, AP3000X, AP310e
FORTINET	AP1020E, AP822E, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
HUAWEI	AP6150DN

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

JUNIPER NETWORKS	AP41E
MIKROTIK	L23UGSR-5HaxD2HaxD, RB912
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	Balance 310 fiber 5G, MAX HD2, MAX HD4
WAVETEL	W3604 Multi-WAN, W3608 Multi-WAN
WLINK	G930
OTHER	4 * RPSMA

VARIANT: S9HV.65.4NM


RAJANT	BreadCrumb ES1–5050CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1–2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
AEROHIVE NETWORKS	AP1130
ARISTA	O-105E
ARUBA	AP-674
CISCO	AIR-CAP1532E, AIR-CAP1562E, AIR-CAP1572EAC, AIR-CAP1572EC, Catalyst 9163E, Catalyst IW6300, IW3702-2E, IW3702-4E, MR74, MR76, MR84, MR86
D-LINK	DWL-8710AP
EXTREME NETWORKS	AP 360E, AP 3965E
FORTINET	FAP-222C
HUAWEI	AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PEPLINK	AP Pro AX
RAJANT	BreadCrumb ES1–5050CS, BreadCrumb LX5–2255A, BreadCrumb LX5–2255B, BreadCrumb LX5–2455D, Hawk BreadCrumb FE1–4950, Hawk BreadCrumb® FE1–5050 / FE1–5050A, Peregrine BreadCrumb® FE1–2255B, Peregrine LTE BreadCrumb FE1–2455LS, Peregrine LTE BreadCrumb FE1–2455LW, Sparrow BreadCrumb ME5–5050CS
RUCKUS	T750SE
SIEMENS	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0
XIRRUS	XH2-120
OTHER	4 * N-male


PLOTS

VSWR

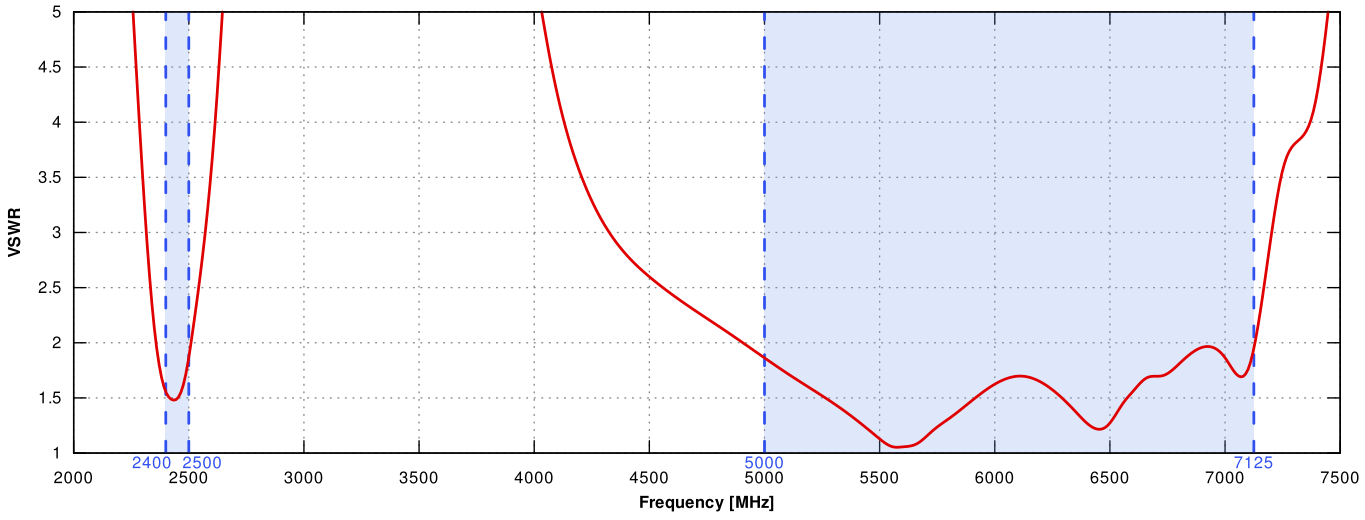


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Gain

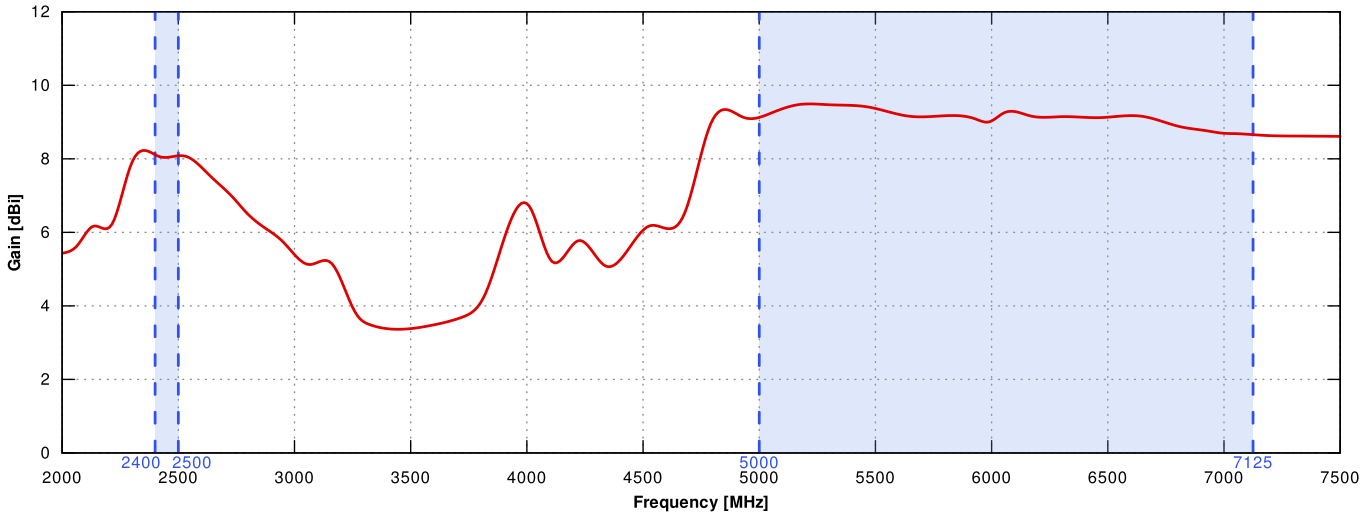


2.4GHz to 2.5GHz

PORT 1&3 ELEVATION

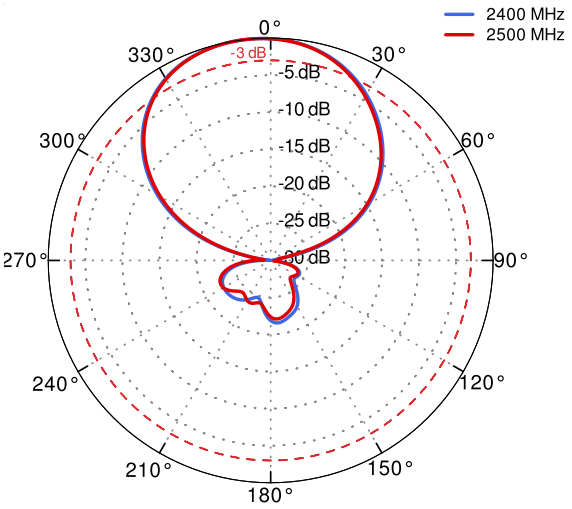


PORT 1&3 AZIMUTH

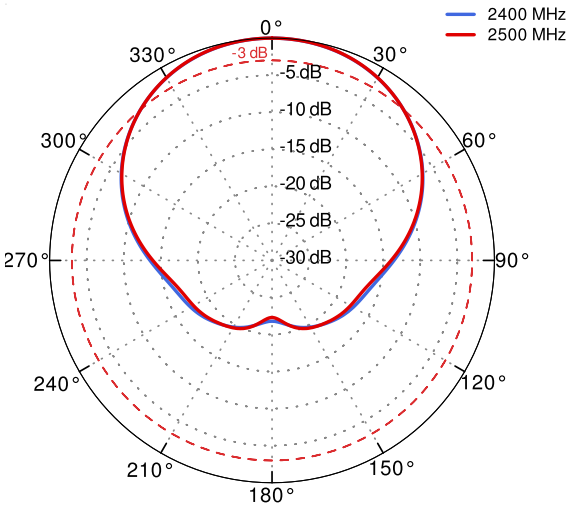


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5GHz to 6GHz

PORT 1&3 ELEVATION

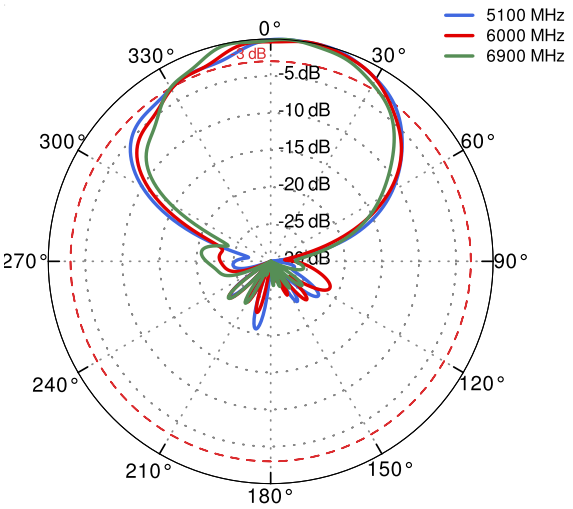


PORT 1&3 AZIMUTH

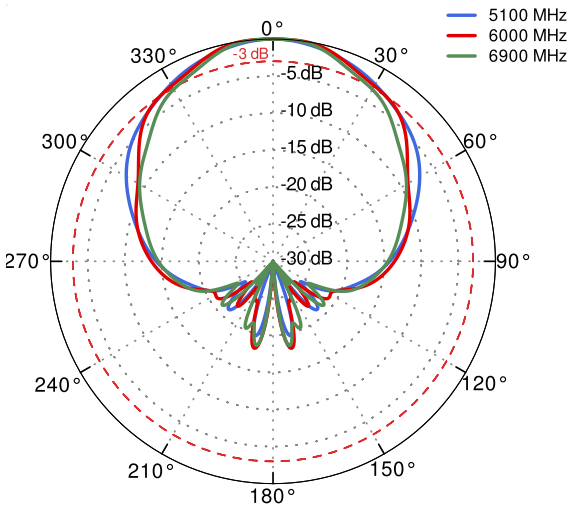


2.4GHz to 2.5GHz

PORT 2&4 ELEVATION

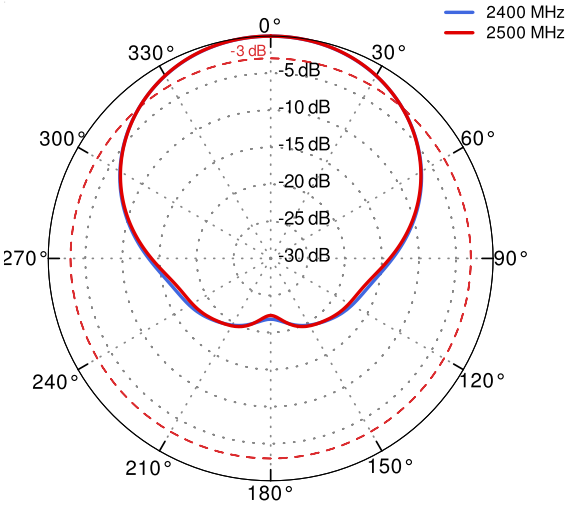


PORT 2&4 AZIMUTH

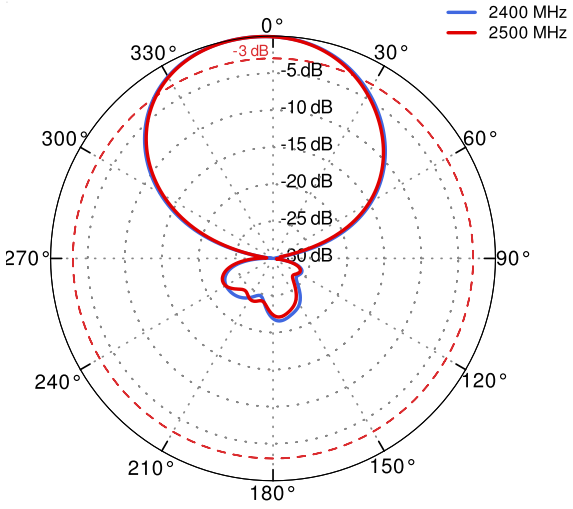


Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5GHz to 6GHz


PORT 2&4 ELEVATION

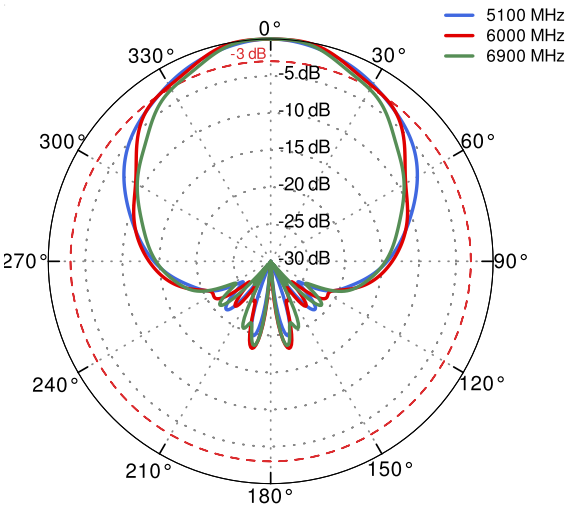


PORT 2&4 AZIMUTH

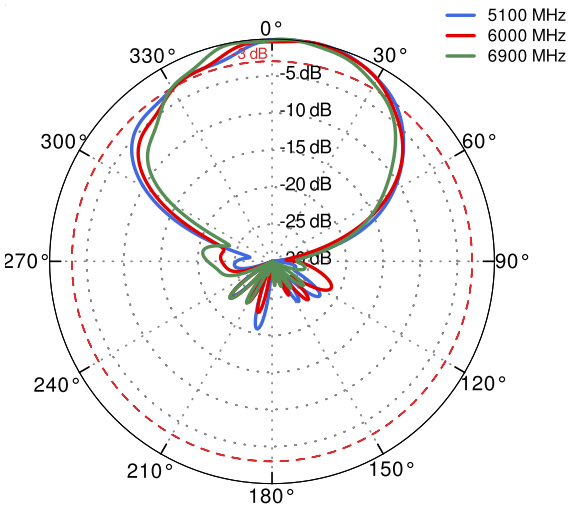

DIMENSIONS

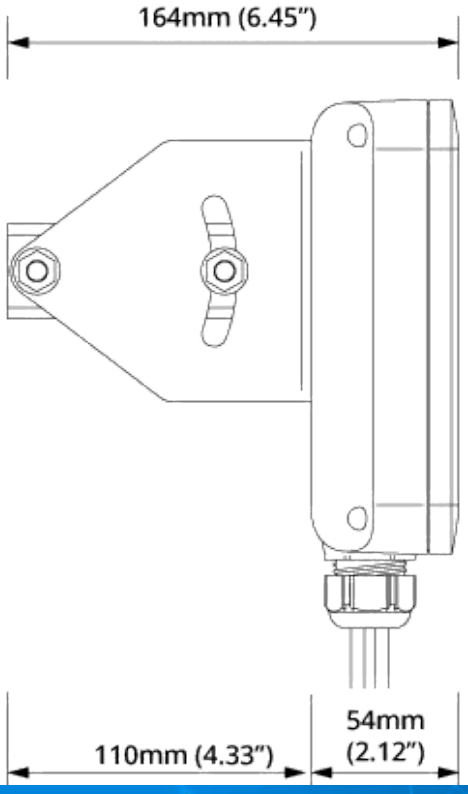

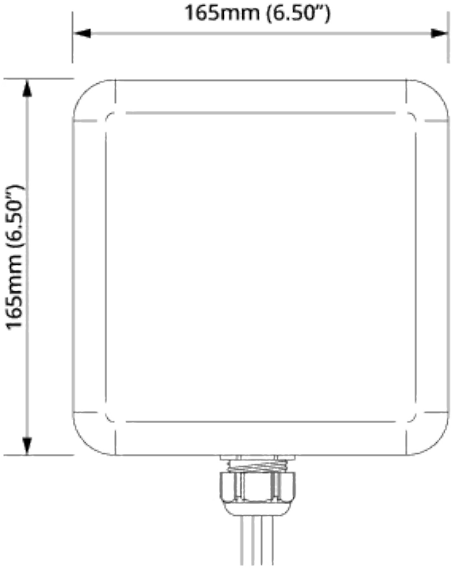

QuWireless
WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416
Support email: support@quwireless.com **Website:** www.quwireless.com
Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.