
Product Data Sheet **CC-12-2**

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

Product Description

Clic Clamp, 1/2" ALF,RCF,RLK polyamide black, halogen free fire class UL94HB




Features/Benefits


Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simply push in by hand, clamp will grip and lock by applying slight pressure.

Technical Specifications

Product Line	Radiating Cable Accessories
Product Type	Hanger
Hanger Type	Clic clamp
Transmission Line Type	ALF12, RCF12, HCA12-50, RHCA12-50, RLKW12, RLKU12
Coaxial Cable Type	Radiating Cable
Cable Size	1/2"
Number of Cable / Waveguide Runs	1
Color	Black
Material	Polyamide
Fire Class	UL94 HB
Installation Temperature, °C(°F)	-20 to +80 (-4 to +176)
Operation Temperature, °C(°F)	-50 to +85 (-58 to +185)
Storage Temperature, °C(°F)	-50 to +85 (-58 to +185)
Hanger Spacing, m (in)	0,5 (20)
Package Quantity	1

Notes

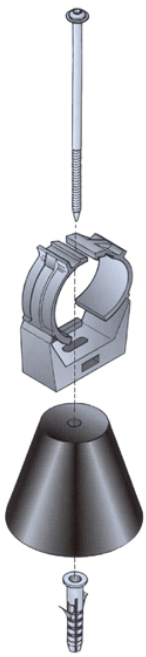

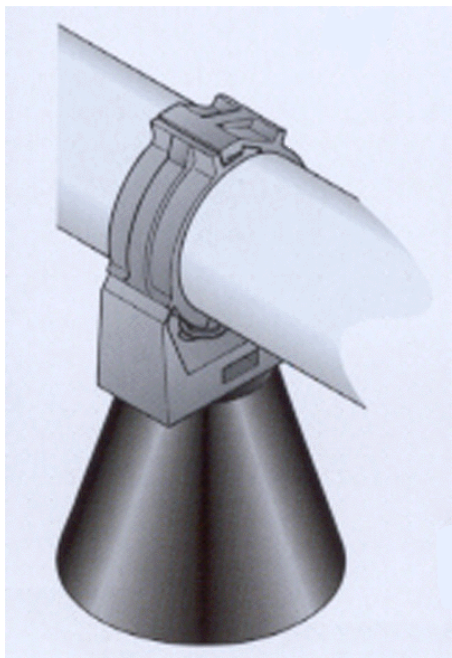

All information contained in the present datasheet is subject to confirmation at time of ordering