
**Product Data Sheet** **CC-78-2**

# Clic clamp for RADIAFLEX® 7/8"

## Product Description

Clic Clamp, 7/8" RADIAFLEX polyamide black, halogen free fire class UL94HB




## Features/Benefits


Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

## Technical Specifications

| | |
|---|---|
| Product Line | Radiating Cable Accessories |
| Product Type | Hanger |
| Hanger Type | Clic clamp |
| Transmission Line Type | RLF78, RLFW78, RAY78, RLKW78, RLKU78, RCF78 |
| Coaxial Cable Type | Radiating Cable |
| Cable Size | 7/8" |
| Number of Cable / Waveguide Runs | 1 |
| Color | Black |
| Material | Polyamide |
| Fire Class | UL94 HB |
| Installation Temperature, °C(°F) | -20 to +80 (-4 to +176) |
| Operation Temperature, °C(°F) | -50 to +85 (-58 to +185) |
| Storage Temperature, °C(°F) | -50 to +85 (-58 to +185) |
| Hanger Spacing, m (in) | 0,9 (35.5) |
| Package Quantity | 1 |

## Notes

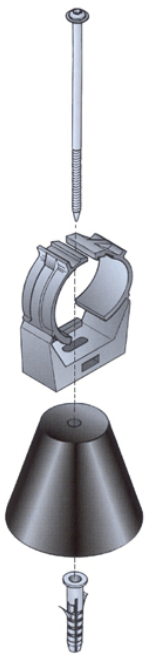

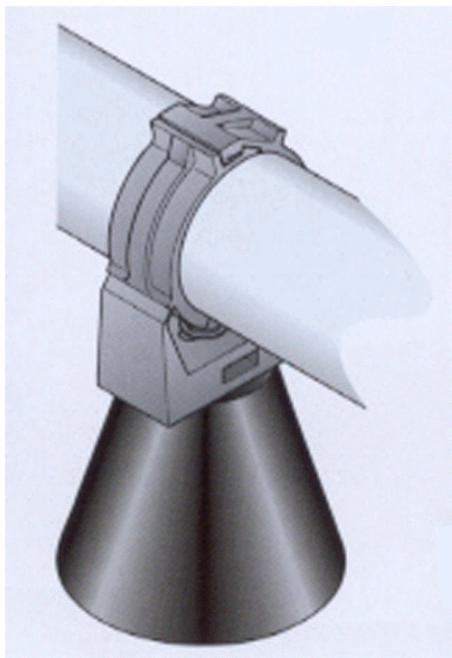

All information contained in the present datasheet is subject to confirmation at time of ordering