M3s/M5s/M7s/M7s Pro DeskPhone



User manual

8AL91479ENAA ed01

Alcatel·Lucent
Enterprise

Introduction

Thank you for choosing an Alcatel-Lucent phone.

This document describes the services offered by the M3s, M5s, M7s and M7s Pro DeskPhones connected to a SIP server.



M7s (Pro) DeskPhone



M5s DeskPhone



M3s DeskPhone

The phones described in this document are supported on different SIP servers, and some features described in this document depend on the SIP server to which the phone is connected.

If more information about system compatibility or about the level of features for a given SIP server is needed, please contact your system administrator.

The labels and icons displayed depend on the type and the skin of the set. The label is not displayed if the corresponding feature is not configured on your telephone system. Depending on the size of the display, some labels may be truncated. *All labels are displayed in colour and are italicized*.

This icon describes a succession of actions or labels you have to do or select: →.

This icon describes the consequence of an action: ››.

Some features depend on the type of the set.

	M7s Pro	M7s	M5s	M3s
IP Phone	●	●	●	●
Multiple SIP Accounts	●	●	●	●
Colour screen	●	●	●	
Monochrome screen				●
Bluetooth® Smart Ready	●			
Compatible with Bluetooth® headset	●			
USB headset	●	●	●	●
Wi-Fi*	●	●	●	
Two-port Gigabit Ethernet switch with Power Over Ethernet support	●	●	●	●
Add-on module EM200	●	●	●	●
Audio services (hands-free, handset and headset)	●	●	●	●
Adjust the brightness of the display	●	●	●	●
Local conference	●	●	●	●
Peer to peer SIP calls	●	●	●	●
Web Based Management	●	●	●	●
Desk sharing	●	●	●	●
Teleworking (OpenVPN)	●	●	●	●

*M5s and M7s are supported via Wi-Fi dongle. To know the supported Wi-Fi dongle, please refer to the Alcatel-Lucent Enterprise website or contact your administrator.

The labels and icons presented in this document are not contractually binding and may be modified without prior warning.

7 Accessories

The ALE-supported accessories are intended to work smoothly on most/all our clients (hardphones, softphones). The list of accessories presented in this document is not contractually binding and may be modified without prior warning.

7.1 List of accessories

7.1.1 USB headset

You can use a USB headset to handle calls on the M3s/M5s/M7s/M7s Pro DeskPhone. To know the supported headsets, please refer to the Alcatel-Lucent Enterprise website or contact your administrator. Unlisted USB headsets may not work properly if you connect them to your phone. For more information on using your USB headset, refer to the corresponding documentation from the manufacturer.

7.1.2 Add-on module

- EM200 Smart Expansion Module.

7.1.3 Adapter

- USB C to USB-A CABLE (box of 10).

7.1.4 USB Wi-Fi Dongle

To know the supported dongle, please refer to the Alcatel-Lucent Enterprise website or contact your administrator.

7.1.5 Other accessories (headsets)

To know the supported headsets, please refer to the Alcatel-Lucent Enterprise website or contact your administrator.

7.2 Add-on module



Phone capabilities can be extended with Add-ons:

- The EM200 add-on offers a maximum of 200 additional keys with LED, colour screen.


EM200




1	LCD screen.	4	Connector to connect the device to the desk phone or already connected add-on (USB-A).
2	Programmable keys.	5	USB-A connector This connector is used for: • Connect to a USB headset. • Connect to an add-on module. • Connect to a Wi-Fi dongle*.
3	Page navigation keys.		

* To know the supported dongle, please refer to the Alcatel-Lucent Enterprise website or contact your administrator.

7.2.1 install the add-on to the desk phone

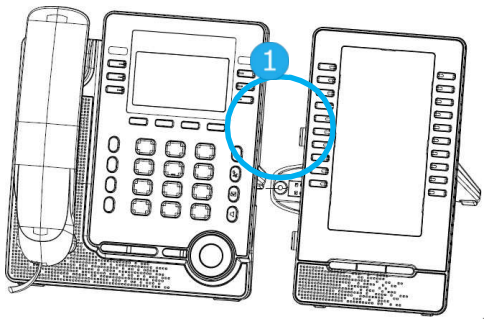

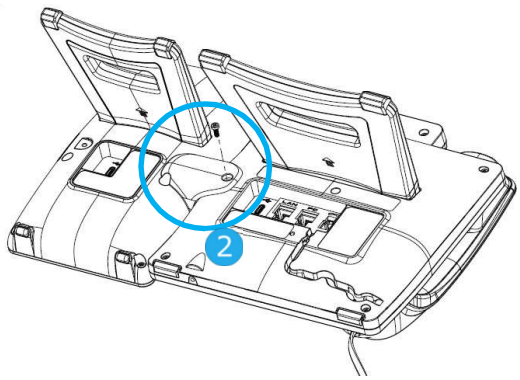

1- Insert the add-on USB-A connector into the USB-A socket of the desk phone.
2- Use the add-on support to fix it to the desk phone using the provided screw.
3- The add-on is powered by the desk phone if the desk phone is connected to an external power adapter.
If your desk phone is powered via PoE, we recommend connecting the EM200 to an USB-C power adapter (DC 5V/2A output, not provided with the add-on).

7.2.2 Install more than one add-on module

It is possible to connect up to three similar add-on modules.

Depending on how the desk phone is powered, you need to use an external power adapter (DC 5V/2A output, not provided with the add-on) connected to the add-on.

Your desk phone is powered via PoE:

- You can connect up to three EM200. The first EM200 which is connected to desk phone must be connected to an external power adapter.


Your desk phone is powered via an external power adapter:

- You can connect one EM200 without an external power adapter.
- You can connect two or three EM200. The first EM200 which is connected to desk phone must be connected to an external power adapter.


7.3 Wall mounting kit

To mount your phone on the wall, you need to install a standard wall plate that you can easily find on the market. Follow the manufacturer's instructions to install the wall plate on the wall. When the wall plate is fixed, you can prepare your phone and mount it on the wall. The wall mount kit is sold separately (refer to chapter: Ordering information).

1 Fix the support with the phone by using the 2 screws provided (the size of screw is M3x8mm).

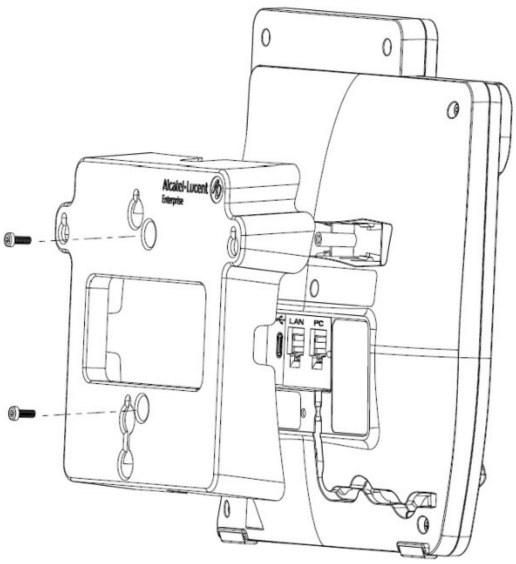

2 Hang the assembled phone with wall mounted kit on the wall plate.

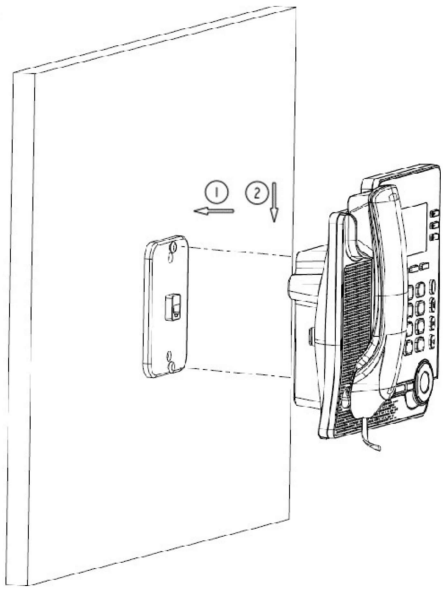

8 Technical specifications

	M7s (Pro)	M5s	M3s
Width	207 mm (8,2 in)	207 mm (8,2 in)	207 mm (8,15 in)
Height	183 mm (7,2 in)	183 mm (7,2 in)	183 mm (7,2 in)
Weight	M7s: 820 g (1,81 lbs) M7s Pro: 825 g (1,82 lbs)	810 g (1,79 lbs)	806 g (1,78 lbs)
2-degree adjustable foot	40° / 55°	40° / 55°	40° / 55°
Colour	Gray	Gray	Gray
Display	3.5-inch colour, 320 x 240 pixels	2.8-inch colour, 320 x 240 pixels	2.8-inch monochrome with backlight, 128 x 64 pixels
Memory (Flash/SDRAM)	256 MB/256 MB	256 MB/256 MB	256 MB/64 MB
Power over Ethernet (IEEE 802.3af)	Class 2	Class 2	Class 2
Power consumption (PoE) Idle – Active (w/o Add-on, w/o USB)	M7s: < 3.1 W M7s Pro: < 3.4 W	< 2.7 W	< 2.6 W
Operating conditions	-5°C - +45°C (23°F - 113°F)	-5°C - +45°C (23°F - 113°F)	-5°C - +45°C (23°F - 113°F)

9 Ordering information

M7s Pro DeskPhone	3MK37020AA
M7s DeskPhone	3MK37019AA
M5s DeskPhone	3MK37018AA
M3s DeskPhone	3MK37017AA
EM200 Smart Expansion Module (add-on module)	3MK27007AA
USB-C to USB-A cable (box of 10)	3MG08020AA
Wide Band Comfort Handset	3MG27032AA
USB Binaural Headset	3GV28057AB
Wall mounting kit	3MK27008AA
USB-C Power Adapter (100–240 V AC/5 V DC) (US)	3MK08005US
USB-C Power Adapter (100–240 V AC/5 V DC) (EU)	3MK08005EU
USB-C Power Adapter (100–240 V AC/5 V DC) (RW)	3MK08005RW