Product Data Sheet **716M-NF**

Coaxial Adapter 7-16 male - N female

Product Description

Coaxial Adapter, 7-16 Male/N Female



Features/Benefits

Technical Specifications


Product Line	Coaxial Cable Components
Product Type	Coaxial Adapter
Coaxial Cable Type	Foam Dielectric, Ultraflexible Foam Dielectric , Radiating Cable
Frequency Range - MHz	DC - 8000
Minimum Return Loss, dB (max. VSWR)	40 (1.02) @ 0-2000 MHz, 34 (1.04) @ 2000-2700 MHz, 30.5 (1.06) @ 2700-3700 MHz
Insertion Loss, dB (Max)	0.02
3rd Order IM Product @ 2x20 Watts, dBc	< -165
Connector A	7-16 DIN Male
Center Contact Connector A	Brass, silver plated
Outer Contact Connector A	Brass, silver plated
Connector B	N Female
Center Contact Connector B	Spring Bronze, silver plated
Outer Contact Connector B	Brass, silver plated
Body	copper alloy, nickel plated
Dielectric	PTFE
Gasket	Silicone rubber
Sealing class	IP68, connected
Operation Temperature, °C(°F)	-45 to 85 (-49 to 185)
Package Quantity	1

Notes

Other Documentation

All information contained in the present datasheet is subject to confirmation at time of ordering

Coaxial Adapter 7-16 male - N female

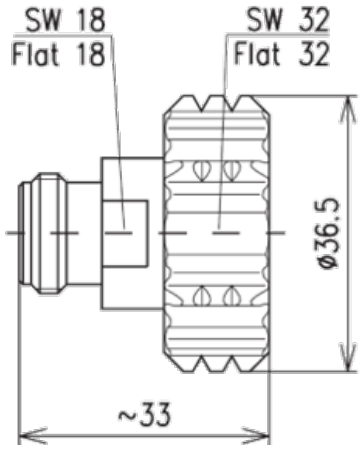

All information contained in the present datasheet is subject to confirmation at time of ordering